

GAS METERS DOOR


SKU 50851



Data Sheet

Fibreglass gas meters door
with UV treatment and galvanised sheet metal frame

Product conforms to UNI 9036:2015

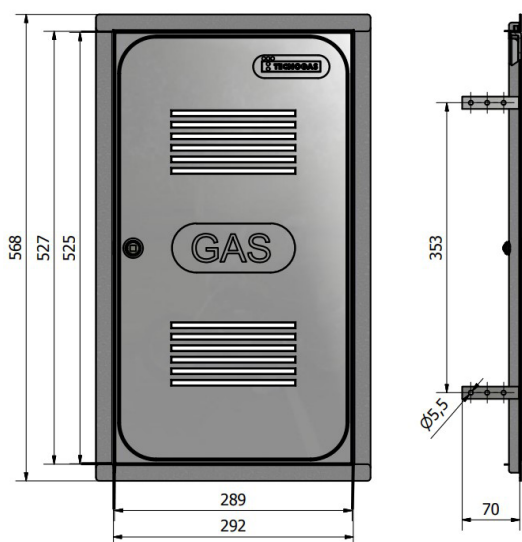


Gas meter door made of fibreglass with anti-UV treatment and anti-cut galvanised sheet metal frame; designed for gas metering units with a volumetric flow rate up to 6m³/h.

Product features

- UV-resistant fibreglass access door
- colour grey RAL 7001
- excellent mechanical resistance to impact and weathering
- 50% ventilation at the bottom and top

Technical specifications

- MATERIAL: SMC (Sheet Moulding Compound)
- COLOUR: RAL 7001
- IMPACT RESISTANCE: IK08
- DEGREE OF PROTECTION: IP20
- VENTILATION SECTION: 1100 mm²
- SHEET THICKNESS: 0.8 mm
- RADIOFREQUENCY ATTENTION: < 2 dBm
- OVERALL DIMENSIONS: 568x334 mm (HxW)
- INTERNAL NET SIZE: 548x300 mm (HxW)
- CLOSURE TYPE: 1/4 turn square closure
- VENTILATION: 50% at the bottom and top
- MOUNTING SYSTEM: folding tabs
- POSSIBLE INSTALLATIONS: inside niche with internal dimensions 555x310 mm

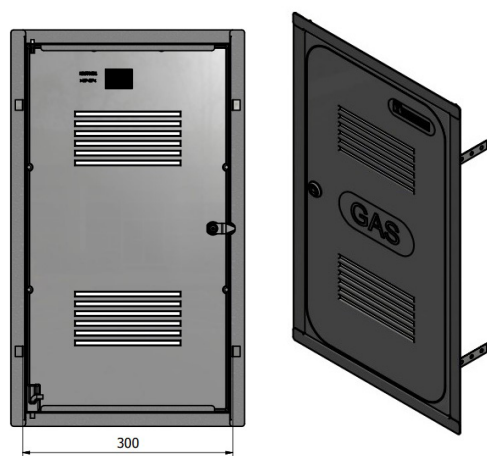

SKU	DESCRIPTION	WEIGHT
50851	Gas meters door	1,43 kg