



## **Tecnical Data Sheet**

### **Syncron Motor**

#### **SKU R02275 - R02276**


- Designed for use in cooling and heating hydronic systems.
- Replacements zone valves actuator.
- Fully sealed water proof design
- Built-in reducer
- Blocking-proof, reliable and long life



## **Specifications**

- Voltage	24VAC@50-60Hz / 230VAC@50Hz-60Hz	
- Power Consumption	6.5 Watts, 7 VA	
- Gear Output direction	Counter-clockwise rotation	
- Ambient Temperature limits	Shipping & Storage	-40 to 160°F (-40 to 71°C)
	Fluid	32 to 200°F (0 to 93°C)
	Ambient	32 to 104°F (0 to 40°C)

**Dimensions** inch(mm)

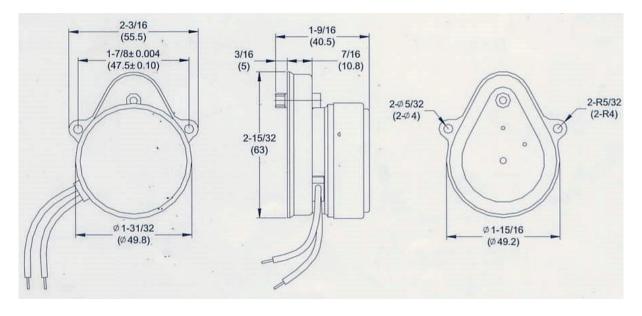









# Scheda tecnica

## **Motore Syncron**

#### cod. R02275 - R02276

- Studiato per uso in sistemi di condizionmento e riscaldamento
- Ricambio per valvole di zona o attuatori
- Totalmente isolato e impermeabile
- Riduttore incorporato
- A prova di blocco, affidabile e di lunga durata



## **Specifiche**

- Voltaggio	24VAC@50-60Hz / 230VAC@50Hz-60Hz	
- Potenza assorbita	6.5 Watts, 7 VA	
- Direzione di uscita del cambio	Rotazione antioraria	
- Temperature di lavoro	Spedizione e Conservazione	-40 a 160°F (-40 a 71°C)
	Fluido	32 a 200°F (0 a 93°C)
	Ambiente	32 a 104°F (0 a 40°C)

**Dimensioni** inch(mm)

